



VHF AND UHF DIGITAL/ANALOG TRANSCEIVERS

**IC-F5123D**

VHF transceiver

**IC-F6123D**

UHF transceiver

**Everything you'd expect in a business radio  
... Plus Digital!**



**IDAS<sup>TM</sup>**  
ICOM DIGITAL ADVANCED SYSTEM

**IDAS<sup>TM</sup> Conventional & IDAS<sup>TM</sup> Single-site Trunking**

**Digital/Analog Mixed Mode Operation**

**Built-in 2-Tone, 5-Tone,  
CTCSS and DTCS**

**MDC 1200 Compatible**

**MIL-STD-810 F  
Rugged Construction**

**4W (typ.) Front  
Mounted Speaker**



Limited functions.

# More than Just Smooth Digital Migration!

## 128 Channels with 8 Zones

Ample 128 channel capacity allows most companies plenty of room to grow. Up to 8 zones lets you group together channels in logical fashion.

## Built Military Rugged!

The tough aluminum die-cast chassis and polycarbonate front panel have been tested to the MIL standard 810 F.

## Compact Hand Microphone

Select from 4 levels of mic gain, for clearer transmission.

## GPS Receiver Connection

With optional D-SUB 25-pin ACC cable OPC-2078, an external GPS receiver or PC can be connected.

\* No digital modulation "IN" using accessory cables.



Photo shows optional OPC-2078 installed on high power version.



## 8-character LCD

An 8-character alphanumeric LCD with user-friendly icons shows a variety of information and operating status such as caller's name, received message, etc.

## Large Programmable Buttons

For easy access to often used functions, P0-P3 buttons are programmable to meet specific needs. Buttons and LCD display are backlit for night time operation.

## Powerful, Front-facing Speaker

4 watts (typ.) front facing speaker delivers clear and loud audio throughout a vehicle's cabin. Digital modulation adds distinct clarity to received voices.

## IDAS™ Digital Mode Operation

The IC-F5123D series provides NXDN™ CAI-based IDAS digital mode operation. It is also compatible with IDAS multi-site conventional and IDAS single-site trunking. The following IDAS features are programmable.

- PTT ID
- Individual/Talkgroup list (Max. 500)
- RAN (Radio Access Number)
- Status
- SDM (Short Data Message)
- Call alert
- Radio check (RX)
- Stun/kill/revive (RX)
- Remote monitor (RX)
- Emergency (No ACK)
- Digital voice scrambler
- GPS data (PC and software required to show received position data)

## Built-in 2-Tone and 5-Tone (Analog mode)

2-Tone and 5-Tone signalings give you selective calling, quiet stand-by and other convenient functions with programming. The stun/kill functions disable a radio over the air and the revive function restores the stunned radio.

## MDC 1200 Compatible (Analog mode)

The following MDC features are available with the built-in MDC signaling.

- PTT ID
- Radio check (RX)
- Emergency (No ACK)
- Stun/Revive (RX)
- 500 alias table (Max.)

## Lone Worker Function

When the radio is not operated for a preset period, a warning beep will sound, alerting the radio user to check in. If the radio user does not check in before the preset time runs out, then the radio automatically sends out an emergency signal.

## Other Features (\* = analog only)

- CTCSS/DTCS encoder/decoder\*
- BIIS PTT ID transmission\*
- 8 DTMF autodial memories
- Microphone hanger action programmable
- Optional DTMF microphone (HM-152T)
- PC programmable
- Power-on password function
- Time out timer
- Talk around function
- Nuisance delete function\*
- Forced narrow function\*

TX: Transmit, RX: Receive

VHF & UHF DIGITAL/ANALOG TRANSCEIVERS

# IC-F5123D IC-F6123D

## Scan Features


The priority scan allows you to monitor one or two priority channels while scanning other non-priority channels. The TX channel and talk back functions allow you to make a quick response while scanning.





# The IC-F5123D series : A multitude of advantages because it's IDAS™

## Advantage 1 Digital/analog Mixed Mode

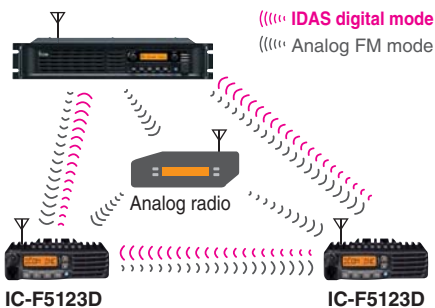

The IC-F5123D series can receive both analog mode and digital mode signals on a single channel and automatically selects the received mode to reply to the received call, while the talk back timer remains. It's a smart way to grow into digital radio – at your own pace, as your budget and comfort allow.

## Advantage 2 Digital and Analog Individual/group Call



The IC-F5123D series allows you to call individual or group users. The radio automatically sends own ID number when the PTT button is held down. The alias name or individual/group ID is displayed on the LCD while receiving a message allowing you to identify who is calling.

## Advantage 3 Status Message and Short Data Message

### Status message example



### Short data message example




The display shows longer messages by automatic vertical scrolling.

Up to 100 status conditions can be set and sent with voice call. Also, you can request another IDAS radio to send their status and receive it.


Up to 100-character of short data message can be sent and received. To send more than 9-character short data message, PC connection is required.

## Advantage 4 GPS Capability

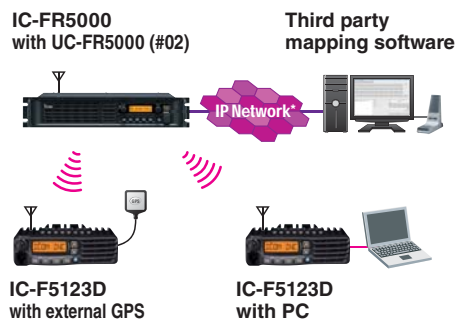


When used with an external GPS receiver, the IC-F5123D series can transmit accurate position data for use with vehicle management applications.

## Advantage 5 Multi-site Conventional Mode

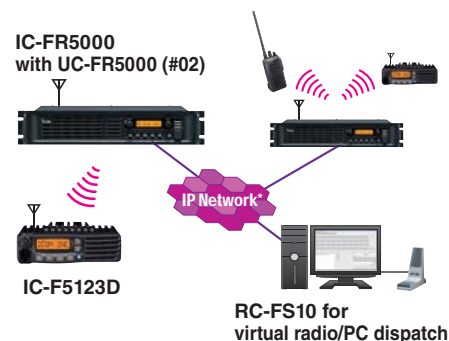

When using the IC-F5123D series in IDAS multi-site conventional mode, the IC-F5123D can communicate with other IDAS radio users working with other repeater sites and/or virtual radio/PC dispatch stations on the IDAS network.

## Advantage 6 IDAS Single-site Trunking

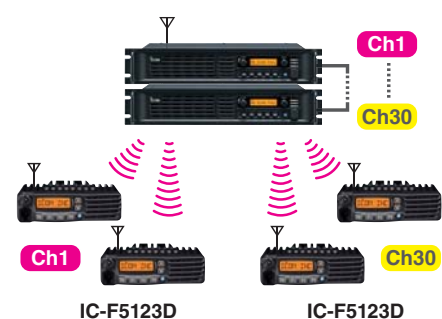

The IC-F5123D series can be used in an IDAS single-site trunking system. The IDAS trunking system is a distributed system with no dedicated control channel, so more voice traffic channels are available for increased system capacity.

All advantages shown represent possible system configurations. Ask your Icom dealer to configure an IDAS system that works best for you.

\*Note: Private IP Network or VPN Tunnels through the Internet with static endpoints.

**SPECIFICATIONS**

	IC-F5123D	IC-F6123D
<b>GENERAL</b>		
Frequency coverage	136–174MHz	350–400MHz (45W) 400–470MHz 450–520MHz
Number of channels	128 channels (8 zones)	
Type of emission	16K0F3E, 8K50F3E, 4K00F1D/F1E	
Channel spacing	25/12.5/6.25kHz	
PLL channel step	2.5/3.125kHz	
Power supply requirement	13.6V DC	
Current drain (approx.)		
Tx	50W/45W 25W	11A 5A
Rx	Max. audio Standby	1.2A 300mA
Antenna impedance	50Ω (SO-239)	
Operating temperature range	–30°C to +60°C ; –22°F to +140°F	
Dimensions (W×H×D) (Projections not included)	150×40×167.5mm; 5.91×1.57×6.59in (50W/45W version) 150×40×117.5mm; 5.91×1.57×4.63in (25W version)	
Weight (approx.)	1.1kg; 2.4lb (50W/45W version) 0.8kg; 1.8lb (25W version)	
<b>TRANSMITTER</b>		
Output power (at 13.6V DC) (50W/45W version) (25W version)	50W, 25W, 5W (Hi, L2, L1) 25W, 10W, 2.5W (Hi, L2, L1)	45W, 25W, 4.5W (Hi, L2, L1) 25W, 10W, 2.5W (Hi, L2, L1)
Max. frequency deviation	±5.0kHz/±2.5kHz (Wide/Narrow)	
Frequency stability	±1.0ppm	
Spurious emissions	70dB min.	
FM Hum and noise	46/40dB typ. (Wide/Narrow)	
Audio harmonic distortion	3% typ. (AF 1kHz 40% deviation)	
FSK error	5% Max. (Digital)	
Ext. microphone impedance	600Ω (8-pin modular)	

	IC-F5123D	IC-F6123D
<b>RECEIVER</b>		
Sensitivity (at 12dB SINAD) (at 5% BER)	0.25μV typ. 0.18μV typ.	
Adjacent channel selectivity	80/70dB typ. (W/N), 65dB typ. (digital)	75/70dB typ. (W/N), 60dB typ. (digital)
Spurious response rejection	70dB min.	
Intermodulation rejection	75dB typ. (W/N), 70dBμV emf typ. (digital)	
Hum and noise	45/40dB typ. (W/N)	
Audio output power (at 5% distortion, 4Ω load)	4W typ.	
Ext. speaker connector	2-conductor 3.5 (d) mm (1/8")/4Ω	

All stated specifications are subject to change without notice or obligation.

**Applicable U.S. Military Specifications**

Standard	MIL 810 F	
	Method	Procedure
Low Pressure	500.4	I, II
High Temperature	501.4	I, II
Low Temperature	502.4	I, II
Temperature Shock	503.4	I
Solar Radiation	505.4	I
Humidity	507.4	–
Settling Dust	510.4	III
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D and -E.

**Supplied Accessories**

- Hand microphone (HM-152)
- DC power cable
- Mounting bracket kit
- Microphone hanger
- Key assign stickers

**OPTIONS**

Some options may not be available in some countries. Please ask your dealer for details.

**HAND MICROPHONES**




**DESKTOP MICROPHONE**



**EXTERNAL SPEAKERS**



**ACC CABLES**



Note: No digital modulation "IN" using accessory cables.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries. NXDN is a trademark of Icom Incorporated and JVC KENWOOD Corporation. IDAS and IDAS logo are trademarks of Icom Incorporated. All other trademarks are the properties of their respective holders.

**Icom Inc.**

1-1-32, Kami-minami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

[www.icom.co.jp/world](http://www.icom.co.jp/world)

**Count on us!**

**Icom America Inc.**

12421 Willows Road NE,  
Kirkland, WA 98034, U.S.A.  
Phone: +1 (425) 454-8155  
Fax: +1 (425) 454-1509  
E-mail: [sales@icomamerica.com](mailto:sales@icomamerica.com)  
URL: <http://www.icomamerica.com>

**Icom (Europe) GmbH**

Communication Equipment  
Auf der Krautweide 24  
65812 Bad Soden am Taunus, Germany  
Phone: +49 (6196) 76685-0  
Fax: +49 (6196) 76685-50  
E-mail: [info@icom-europe.com](mailto:info@icom-europe.com)  
URL: <http://www.icomeurope.com>

**Icom France s.a.s.**

Zac de la Plaine,  
1 Rue Brindejonc des Moulinais, BP 45804,  
31505 Toulouse Cedex 5, France  
Phone: +33 (5) 61 36 03 03  
Fax: +33 (5) 61 36 03 00  
E-mail: [icom@icom-france.com](mailto:icom@icom-france.com)  
URL: <http://www.icom-france.com>

**Asia Icom Inc.**

6F No.68, Sec. 1 Cheng-Teh Road,  
Taipei, Taiwan, R.O.C.  
Phone: +886 (02) 2559 1899  
Fax: +886 (02) 2559 1874  
E-mail: [sales@asia-icom.com](mailto:sales@asia-icom.com)  
URL: <http://www.asia-icom.com>

Your local distributor/dealer:

**Icom Canada**

Glenwood Centre #150-6165  
Highway 17A, Delta, B.C.,  
V4K 5B8, Canada  
Phone: +1 (604) 952-4266  
Fax: +1 (604) 952-0090  
E-mail: [info@icomcanada.com](mailto:info@icomcanada.com)  
URL: <http://www.icomcanada.com>

**Icom Spain S.L.**

Ctra. Rubi, No. 88 "Edificio Can Castanyer"  
Bajos A 08174, Sant Cugat del Valles,  
Barcelona, Spain  
Phone: +34 (93) 590 26 70  
Fax: +34 (93) 589 04 46  
E-mail: [icom@icomspain.com](mailto:icom@icomspain.com)  
URL: <http://www.icomspain.com>

**Icom (Australia) Pty. Ltd.**

Unit 1 / 103 Garden Road,  
Clayton, VIC 3168 Australia  
Phone: +61 (03) 9549 7500  
Fax: +61 (03) 9549 7505  
E-mail: [sales@icom.net.au](mailto:sales@icom.net.au)  
URL: <http://www.icom.net.au>

**Shanghai Icom Ltd.**

No.101, Building 9, Caifuxingyuan Park,  
No.188 Maoting Road, Chedun Town,  
Songjiang District, Shanghai, 201611, China  
Phone: +86 (021) 6153 2768  
Fax: +86 (021) 5765 9987  
E-mail: [bjicom@bjicom.com](mailto:bjicom@bjicom.com)  
URL: <http://www.bjicom.com>

**Icom Brazil**

Rua Itororó, 444 Padre Eustáquio  
Belo Horizonte MG,  
CEP: 30720-450, Brazil  
Phone: +55 (31) 3582 8847  
Fax: +55 (31) 3582 8987  
E-mail: [sales@icombrasil.com](mailto:sales@icombrasil.com)

**Icom (UK) Ltd.**

Blacksole House, Altira Park,  
Herne Bay, Kent, CT6 6GZ, U.K.  
Phone: +44 (0) 1227 741741  
Fax: +44 (0) 1227 741742  
E-mail: [info@icomuk.co.uk](mailto:info@icomuk.co.uk)  
URL: <http://www.icomuk.co.uk>

**Icom New Zealand**

39C Rennie Drive, Airport Oaks,  
Auckland, New Zealand  
Phone: +64 (09) 274 4062  
Fax: +64 (09) 274 4708  
E-mail: [inquiries@icom.co.nz](mailto:inquiries@icom.co.nz)  
URL: <http://www.icom.co.nz>